


# 袋帽形U-NUT规格表

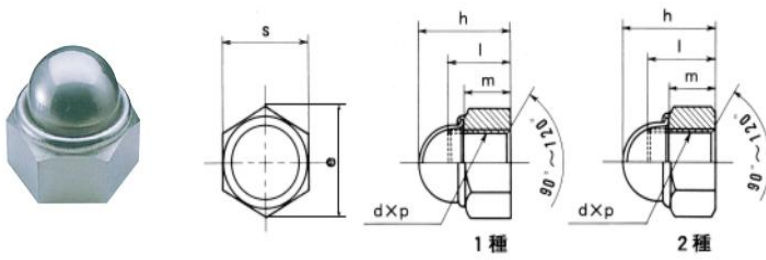

螺纹精度: JIS6H(2级)

M14以上 ○ 为标准品  
 △ 为订制品

		螺母本体材质				SS400	S45C	SUS304	单重 (g)				
		袋帽材质				SPCC		SUS304					
		摩擦片材质				SUS301		SUS301					
称呼 (d)	节距 (p)	对面宽度(s)		全厚度(h)		螺纹高(m) 约	(l)		1种	2种	2种	1种	约
		尺寸	公差	尺寸	公差		MAX	MIN					
M5	0.8	8	0	9	±0.6	3.9	7.4	5.5		○			1.4
M6	1	10	-0.2	10.5		4.2	7.9	6.2		○	△	○	2.5
M8	1.25	12	0	13.6	±0.8	6.2	10.8	8.6		△			4.6
		13		6.1		8.6		○	△	○	5.7		
		14							△			6.8	
M10	1.5	17	-0.25	15.5		7.1	12.8	10.1		○	△	○	11.6
	1.25									△	△		
M12	1.75	19	0	19	±1	9	15.8	12.5		○	△	○	16.6
	1.5									△	△		
	1.25									△	△		
M14	2	22	-0.35	24.5		11	19.8	15	○		△	○	25.9
	1.5								△				
M16	2	24	-0.35	26.5	±2	13	20.8	17	○		△	○	36.2
	1.5								△		△		
M18	2.5	27	0	28.5		14	22.8	19	△		△		47.1
	1.5									△			
M20	2.5	30	-0.35	31		15.4	24.8	20.4	○		△		66
	1.5								△		△		