


螺母型


--MT型产品规格表

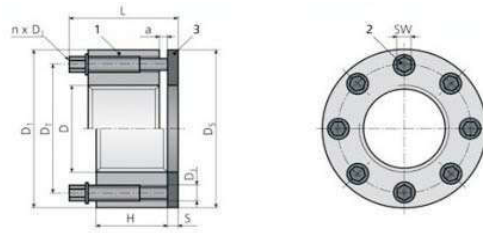

型号	尺寸				螺母			顶推螺丝				垫圈		总高度	重量	预紧力		扭矩	
	螺纹		节距		D1	H	DT	DJ	n	SW	a	DS	S			L	[kg]	nom.	max.
	D	P1	P2	P3										F1	F2			M1	M2
	[mm]				[mm]			[mm]				[mm]		[kN]		[Nm]			
MT-M16x.../W	M16	2.0	1.5	1.0	34	16	25	M6x0.75	4	5	6	32	3	33	0.11	73	94	14	18
MT-M20x.../W	M20	2.5	1.5	1.0	38	16	29	M6x0.75	6	5	6	38	4	34	0.14	110	140	14	18
MT-M22x.../W	M22	2.5	1.5	1.0	41	16	31	M6x0.75	6	5	6	41	4	34	0.16	110	140	14	18
MT-M24x.../W	M24	3.0	2.0	1.5	44	16	33	M6x0.75	8	5	6	43	4	34	0.19	145	187	14	18
MT-M27x.../W	M27	3.0	2.0	1.5	50	24	39	M8x1	6	6	6	50	5	45	0.35	214	285	36	48
MT-M30x.../W	M30	3.5	2.0	1.5	53	24	42	M8x1	6	6	6	53	5	45	0.37	214	285	36	48
MT-M33x.../W	M33	3.5	2.0	1.5	59	24	45	M8x1	8	6	6	59	5	45	0.48	285	380	36	48
MT-M36x.../W	M36	4.0	3.0	1.5	66	32	51	M10x1.25	6	8	8	66	5	57	0.76	343	457	72	96
MT-M39x.../W	M39	4.0	3.0	1.5	70	32	54	M10x1.25	8	8	8	70	5	57	0.9	457	610	72	96
MT-M42x.../W	M42	4.5	3.0	1.5	75	32	57	M10x1.25	8	8	8	73	5	57	1.01	457	610	72	96
MT-M45x.../W	M45	4.5	3.0	1.5	83	38	63	M12x1.25	8	10	10	81	6	68	1.48	700	935	131	175
MT-M48x.../W	M48	5.0	3.0	1.5	85	38	66	M12x1.25	8	10	10	85	6	68	1.5	700	935	131	175
MT-M52x.../W	M52	5.0	3.0	2.0	94	38	70	M12x1.25	8	10	10	89	6	68	1.8	700	935	131	175
MT-M56x.../W	M56	5.5	4.0	2.0	100	38	76	M12x1.25	8	10	10	95	6	68	2	700	935	131	175
MT-M60x.../W	M60	5.5	4.0	2.0	107	38	78	M12x1.25	10	10	10	100	6	68	2.3	875	1160	131	175
MT-M64x.../W	M64	6.0	4.0	2.0	113	53	87	M16x1.5	8	14	12	112	8	92	3.65	1270	1690	315	420
MT-M68x.../W	M68	6.0	4.0	2.0	117	53	91	M16x1.5	8	14	12	117	8	92	3.85	1270	1690	315	420
MT-M72x.../W	M72	6.0	4.0	2.0	120	56	95	M16x1.5	8	14	9	120	8	92	4	1270	1690	315	420
MT-M76x.../W	M76	6.0	4.0	2.0	132	56	100	M16x1.5	12	14	9	127	8	92	5.1	1900	2530	315	420
MT-M80x.../W	M80	6.0	4.0	2.0	132	56	103	M16x1.5	12	14	9	127	8	92	4.8	1900	2530	315	420
MT-M85x.../W	M85	6.0	4.0	2.0	137	56	108	M16x1.5	12	14	9	137	8	92	5.1	1900	2530	315	420
MT-M90x.../W	M90	6.0	4.0	2.0	145	59	113	M16x1.5	16	14	13	140	8	99	6	2530	3380	315	420
MT-M100x.../W	M100	6.0	4.0	2.0	164	61	123	M16x1.5	16	14	11	152	8	99	7.8	2530	3380	315	420
MT-M110x.../W	M110	6.0	4.0	2.0	177	79	139	M20x1.5	12	17	16	172	10	125	11.4	3150	4200	645	860
MT-M120x.../W	M120	6.0	4.0	2.0	189	81	149	M20x1.5	16	17	14	179	10	125	13	4200	5600	645	860
MT-M125x.../W	M125	6.0	4.0	2.0	194	81	154	M20x1.5	16	17	14	190	10	125	13.5	4200	5600	645	860
MT-M130x.../W	M130	6.0	4.0	2.0	205	94	159	M20x1.5	18	17	16	202	10	140	17.5	4700	6300	645	860
MT-M140x.../W	M140	6.0	4.0	2.0	215	94	169	M20x1.5	20	17	16	215	10	140	18.7	5250	7000	645	860
MT-M150x.../W	M150	6.0	4.0	2.0	225	94	179	M20x1.5	20	17	16	225	12	142	20	5250	7000	645	860
MT-M160x.../W	M160	6.0	4.0	-	234	107	189	M20x1.5	24	17	23	234	12	162	24.1	6300	8400	645	860

螺母型


--CY型产品规格表

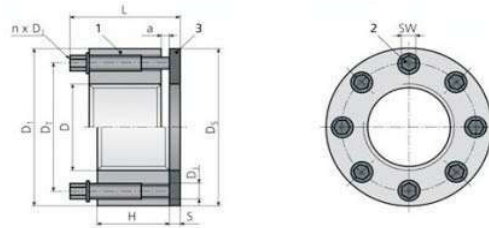

型号	尺寸				螺母			顶推螺丝				垫圈		总高度	重量	预紧力		扭矩	
	螺纹	节距			D1	H	DT	DJ	n	SW	a	DS	S			L	[kg]	nom.	max.
	D	P1	P2	P3										F1	F2			M1	M2
	[mm]				[mm]			[mm]	[mm]			[mm]	[mm]	[kg]	[kN]		[Nm]		
CY-M16x.../W	M16	2	1.5	1.0	34	16	25	M6x0.75	6	5	6	32	3	33	0.12	110	140	14	18
CY-M20x.../W	M20	2.5	1.5	1.0	38	17	29	M6x0.75	8	5	5	38	4	34	0.15	145	185	14	18
CY-M22x.../W	M22	2.5	1.5	1.0	41	17	31	M6x0.75	8	5	5	41	4	34	0.17	145	185	14	18
CY-M24x.../W	M24	3.0	2.0	1.5	47	24	36	M8x1	6	6	6	47	4	44	0.3	215	285	36	48
CY-M27x.../W	M27	3.0	2.0	1.5	51	24	39	M8x1	8	6	6	50	5	45	0.37	285	380	36	48
CY-M30x.../W	M30	3.5	2.0	1.5	54	24	42	M8x1	8	6	6	53	5	45	0.38	285	380	36	48
CY-M33x.../W	M33	3.5	2.0	1.5	62	32	48	M10x1.25	6	8	8	61	5	57	0.7	345	460	72	96
CY-M36x.../W	M36	4.0	3.0	1.5	66	32	51	M10x1.25	8	8	8	66	5	57	0.79	455	610	72	96
CY-M39x.../W	M39	4.0	3.0	1.5	72	32	54	M10x1.25	10	8	8	70	5	57	0.97	570	760	72	96
CY-M42x.../W	M42	4.5	3.0	1.5	76	32	57	M10x1.25	12	8	8	73	5	57	1.1	685	915	72	96
CY-M45x.../W	M45	4.5	3.0	1.5	81	38	62	M12x1.25	8	10	10	80	6	68	1.4	700	910	131	175
CY-M48x.../W	M48	5.0	3.0	1.5	85	38	66	M12x1.25	10	10	10	85	6	68	1.54	875	1170	131	175
CY-M52x.../W	M52	5.0	3.0	2.0	94	38	70	M12x1.25	12	10	10	90	6	68	1.8	1050	1400	131	175
CY-M56x.../W	M56	5.5	4.0	2.0	98	38	74	M12x1.25	12	10	10	94	6	68	1.93	1050	1400	131	175
CY-M60x.../W	M60	5.5	4.0	2.0	107	59	83	M16x1.5	8	14	13	106	8	99	3.7	1270	1670	315	420
CY-M64x.../W	M64	6.0	4.0	2.0	113	59	87	M16x1.5	10	14	13	112	8	99	4.1	1580	2100	315	420
CY-M68x.../W	M68	6.0	4.0	2.0	117	59	91	M16x1.5	12	14	13	117	8	99	4.3	1900	2530	315	420
CY-M72x.../W	M72	6.0	4.0	2.0	121	59	95	M16x1.5	12	14	13	120	8	99	4.5	1900	2530	315	420
CY-M76x.../W	M76	6.0	4.0	2.0	132	61	102	M16x1.5	16	14	11	127	8	99	5.6	2530	3370	315	420
CY-M80x.../W	M80	6.0	4.0	2.0	133	61	103	M16x1.5	16	14	11	127	8	99	5.4	2530	3370	315	420
CY-M85x.../W	M85	6.0	4.0	2.0	139	61	108	M16x1.5	16	14	11	137	8	99	5.8	2530	3370	315	420
CY-M90x.../W	M90	6.0	4.0	2.0	145	61	113	M16x1.5	16	14	11	140	8	99	6.3	2530	3370	315	420
CY-M100x.../W	M100	6.0	4.0	2.0	157	61	123	M16x1.5	16	14	11	152	8	99	7	2530	3370	315	420
CY-M110x.../W	M110	6.0	4.0	2.0	177	61	133	M16x1.5	20	14	11	163	8	99	9	3180	4200	315	420
CY-M120x.../W	M120	6.0	4.0	2.0	189	81	149	M20x1.5	18	17	14	179	10	125	13.1	4700	6300	645	860
CY-M125x.../W	M125	6.0	4.0	2.0	194	81	154	M20x1.5	18	17	14	190	10	125	13.7	4700	6300	645	860
CY-M130x.../W	M130	6.0	4.0	2.0	205	94	159	M20x1.5	20	17	16	202	10	140	17.6	5250	7000	645	860
CY-M140x.../W	M140	6.0	4.0	2.0	215	94	169	M20x1.5	22	17	16	215	10	140	18.89	5750	7700	645	860
CY-M150x.../W	M150	6.0	4.0	2.0	225	94	179	M20x1.5	22	17	16	225	12	142	20.1	5750	7700	645	860
CY-M160x.../W	M160	6.0	4.0	-	226	107	189	M20x1.5	24	17	23	220	10	160	20.8	6300	8400	645	860

螺母型


--H650型产品规格表

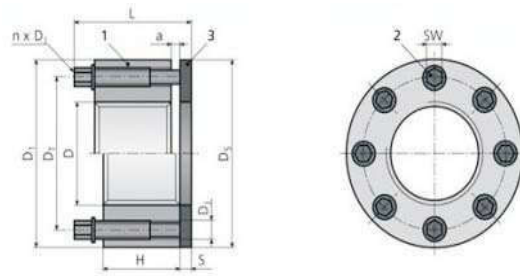

型号	尺寸				螺母			顶推螺丝				垫圈		总高度	重量	预紧力	扭矩
	螺纹	节距			D1	H	DT	DJ	n	SW	a	DS	S			L	[kg]
		D	P1	P2										P3	F1		
	[mm]				[mm]			[mm]		[mm]		[mm]			[kN]	[Nm]	
H650-M20x../W	M20	2.5	1.5	1.0	38	16	29	M6x0.75	6	5	6	38	4	34	0.14	75	10
H650-M22x../W	M22	2.5	1.5	1.0	41	16	31	M6x0.75	6	5	6	41	4	34	0.16	94	12
H650-M24x../W	M24	3.0	2.0	1.5	44	16	33	M6x0.75	8	5	6	43	4	34	0.19	110	11
H650-M27x../W	M27	3.0	2.0	1.5	50	24	39	M8x1	6	6	6	50	5	45	0.35	140	24
H650-M30x../W	M30	3.5	2.0	1.5	53	24	42	M8x1	6	6	6	53	5	45	0.37	175	30
H650-M33x../W	M33	3.5	2.0	1.5	59	24	45	M8x1	8	6	6	59	5	45	0.48	215	27
H650-M36x../W	M36	4.0	3.0	1.5	66	32	51	M10x1.25	6	8	8	66	5	57	0.76	255	53
H650-M39x../W	M39	4.0	3.0	1.5	70	32	54	M10x1.25	8	8	8	70	5	57	0.9	300	47
H650-M42x../W	M42	4.5	3.0	1.5	75	32	57	M10x1.25	8	8	8	73	5	57	1.01	350	55
H650-M45x../W	M45	4.5	3.0	1.5	83	38	63	M12x1.25	8	10	10	81	6	68	1.48	405	75
H650-M48x../W	M48	5.0	3.0	1.5	85	38	66	M12x1.25	8	10	10	85	6	68	1.5	455	85
H650-M52x../W	M52	5.0	3.0	2.0	94	38	70	M12x1.25	8	10	10	89	6	68	1.8	540	100
H650-M56x../W	M56	5.5	4.0	2.0	100	38	76	M12x1.25	8	10	10	95	6	68	2	630	120
H650-M60x../W	M60	5.5	4.0	2.0	107	38	78	M12x1.25	10	10	10	100	6	68	2.3	740	110
H650-M64x../W	M64	6.0	4.0	2.0	113	53	87	M16x1.5	8	14	12	112	8	92	3.65	830	205
H650-M72x../W	M72	6.0	4.0	2.0	120	56	95	M16x1.5	8	14	9	120	8	92	4	1070	265
H650-M76x../W	M76	6.0	4.0	2.0	132	56	100	M16x1.5	12	14	9	127	8	92	5.1	1200	200
H650-M80x../W	M80	6.0	4.0	2.0	132	56	103	M16x1.5	12	14	9	127	8	92	4.8	1330	220
H650-M90x../W	M90	6.0	4.0	2.0	145	59	113	M16x1.5	16	14	13	140	8	99	6	1730	215
H650-M100x../W	M100	6.0	4.0	2.0	164	61	123	M16x1.5	16	14	11	152	8	99	7.8	2170	270
H650-M110x../W	M110	6.0	4.0	2.0	177	79	139	M20x1.5	12	17	16	172	10	125	11.4	2650	550
H650-M120x../W	M120	6.0	4.0	2.0	189	81	149	M20x1.5	16	17	14	179	10	125	13	3210	500
H650-M125x../W	M125	6.0	4.0	2.0	194	81	154	M20x1.5	16	17	14	190	10	125	13.5	3470	540

螺母型


--H650T型产品规格表

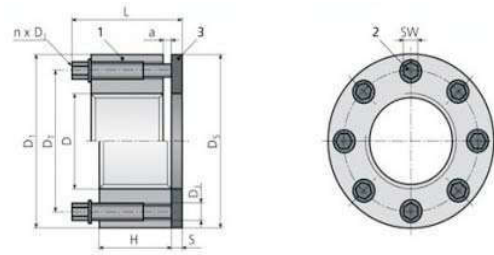

型号	尺寸				螺母			顶推螺丝			垫圈		总高度	重量	预紧力	扭矩	
	螺纹	节距			D1	H	DT	DJ	n	SW	a	DS	S	L	[kg]	nom.	nom.
		D	P1	P2												P3	F1
	[mm]				[mm]			[mm]		[mm]		[mm]		[kN]	[Nm]		
H650T-M24x../W	M24	3	2.0	1.5	41	28	32	M6x0.75	8	5	4	40	3	43	0.2	110	11
H650T-M27x../W	M27	3.0	2.0	1.5	43	28	35	M6x0.75	10	5	4	43	3	43	0.25	140	11
H650T-M30x../W	M30	3.5	2.0	1.5	46	28	38	M6x0.75	12	5	4	46	3	43	0.25	175	11
H650T-M33x../W	M33	3.5	2.0	1.5	49	28	41	M6x0.75	14	5	4	49	3	43	0.3	215	12
H650T-M36x../W	M36	4.0	3.0	1.5	53	28	44	M6x0.75	16	5	4	53	6	46	0.35	255	12
H650T-M39x../W	M39	4.0	3.0	1.5	61	38	50	M8x1	10	6	5	61	4	57	0.6	300	30
H650T-M42x../W	M42	4.5	3.0	1.5	64	38	53	M8x1	12	6	5	64	4	57	0.65	350	30
H650T-M45x../W	M45	4.5	3.0	1.5	67	38	56	M8x1	14	6	5	67	6	59	0.75	405	29
H650T-M48x../W	M48	5.0	3.0	1.5	72	38	59	M8x1	14	6	5	70	10	63	0.9	455	33
H650T-M52x../W	M52	5.0	3.0	2.0	79	46	66	M10x1.25	12	8	6	78	5	69	1.25	540	56
H650T-M56x../W	M56	5.5	4.0	2.0	84	46	70	M10x1.25	14	8	6	82	10	74	1.45	630	57
H650T-M60x../W	M60	5.5	4.0	2.0	90	46	74	M10x1.25	16	8	6	86	14	78	1.75	740	58
H650T-M64x../W	M64	6.0	4.0	2.0	96	62	80	M12x1.25	12	10	8	96	18	102	2.75	830	105
H650T-M72x../W	M72	6.0	4.0	2.0	106	62	88	M12x1.25	16	10	8	105	6	90	2.8	1070	100
H650T-M76x../W	M76	6.0	4.0	2.0	114	62	96	M12x1.25	16	10	8	112	12	96	3.5	1200	110
H650T-M80x../W	M80	6.0	4.0	2.0	118	62	96	M12x1.25	18	10	8	112	15	99	3.7	1330	110
H650T-M90x../W	M90	6.0	4.0	2.0	135	80	111	M16x1.5	14	14	9	135	9	117	6.1	1730	245
H650T-M100x../W	M100	6.0	4.0	2.0	149	80	121	M16x1.5	16	14	9	144	19	127	7.85	2170	270

螺母型

—SJ型产品规格表

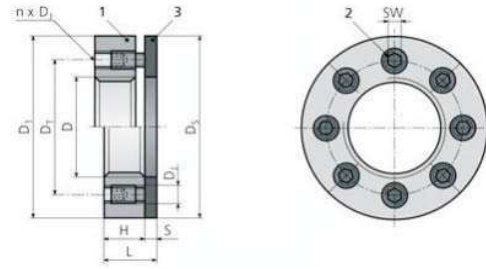

型号	尺寸				螺母			顶推螺栓			垫圈		总高度	重量	预紧力		扭矩	
	螺纹	节距			D1	H	DT	DJ	n	SW	DS	S			L	[kg]	nom.	max.
	D	P1	P2	P3									F1	F2			M1	M2
	[mm]				[mm]			[mm]	[mm]	[mm]		[mm]	[kN]	[Nm]				
SJ-M20x../W	M20	2.5	1.5	1.0	43	15	32	M8x1	6	4	43	4	19	0.15	67	91	11	15
SJ-M22x../W	M22	2.5	1.5	1.0	47	16	34	M8x1	8	4	45	5	21	0.2	81	105	10	13
SJ-M24x../W	M24	3.0	2.0	1.5	50	16	36	M8x1	8	4	48	5	21	0.2	89	120	11	15
SJ-M27x../W	M27	3.0	2.0	1.5	53	16	39	M8x1	10	4	50	5	21	0.25	100	130	10	13
SJ-M30x../W	M30	3.5	2.0	1.5	60	21	45	M10x1.25	8	5	59	5	26	0.4	135	180	21	28
SJ-M33x../W	M33	3.5	2.0	1.5	63	22	48	M10x1.25	10	5	63	5	27	0.4	155	200	19	25
SJ-M36x../W	M36	4.0	3.0	1.5	69	28	54	M12x1.25	8	6	69	5	33	0.65	190	245	35	46
SJ-M39x../W	M39	4.0	3.0	1.5	75	28	57	M12x1.25	10	6	75	5	33	0.8	255	335	38	50
SJ-M42x../W	M42	4.5	3.0	1.5	81	28	60	M12x1.25	12	6	78	5	33	0.9	315	420	39	52
SJ-M45x../W	M45	4.5	3.0	1.5	88	28	63	M12x1.25	12	6	81	6	34	1	315	420	39	52
SJ-M48x../W	M48	5.0	3.0	1.5	101	31	71	M16x1.5	8	8	94	6	37	1.65	380	500	94	125
SJ-M52x../W	M52	5.0	3.0	2.0	101	33	75	M16x1.5	8	8	94	6	39	1.65	380	500	94	125
SJ-M56x../W	M56	5.5	4.0	2.0	113	33	79	M16x1.5	12	8	100	6	39	2.05	570	760	94	125
SJ-M60x../W	M60	5.5	4.0	2.0	117	33	83	M16x1.5	12	8	106	6	39	2.15	570	760	94	125
SJ-M64x../W	M64	6.0	4.0	2.0	119	33	87	M16x1.5	12	8	120	8	41	2.45	570	760	94	125
SJ-M68x../W	M68	6.0	4.0	2.0	138	38	97	M20x1.5	12	10	125	8	46	3.6	710	950	145	195
SJ-M72x../W	M72	6.0	4.0	2.0	151	38	101	M20x1.5	12	10	125	8	46	4.5	910	1200	185	245
SJ-M76x../W	M76	6.0	4.0	2.0	151	38	105	M20x1.5	12	10	138	8	46	4.35	860	1130	175	230
SJ-M80x../W	M80	6.0	4.0	2.0	158	38	109	M20x1.5	12	10	145	10	48	4.95	910	1200	185	245
SJ-M90x../W	M90	6.0	4.0	2.0	170	51	125	M24x2	12	12	160	10	61	7.2	1160	1530	280	370
SJ-M100x../W	M100	6.0	4.0	2.0	177	53	135	M24x2	12	12	180	10	63	7.75	1160	1530	280	370
SJ-M110x../W	M110	6.0	4.0	2.0	190	59	145	M24x2	16	12	190	10	69	9.25	1550	2040	280	370
SJ-M120x../W	M120	6.0	4.0	2.0	202	59	155	M24x2	16	12	202	10	69	10.25	1550	2040	280	370
SJ-M125x../W	M125	6.0	4.0	2.0	205	59	160	M24x2	16	12	202	10	69	10.25	1550	2040	280	370
SJ-M130x../W	M130	6.0	4.0	2.0	210	59	165	M24x2	16	12	202	10	69	10.5	1550	2040	280	370
SJ-M140x../W	M140	6.0	4.0	2.0	221	59	175	M24x2	16	12	215	12	71	11.75	1550	2040	280	370
SJ-M150x../W	M150	6.0	4.0	2.0	230	59	185	M24x2	16	12	225	12	71	12.25	1550	2040	280	370
SJ-M160x../W	M160	6.0	4.0	-	240	59	195	M24x2	16	12	240	12	71	13.25	1550	2040	280	370